


RZN 4402-K V2 SHEV control panel



GEH-S RWA

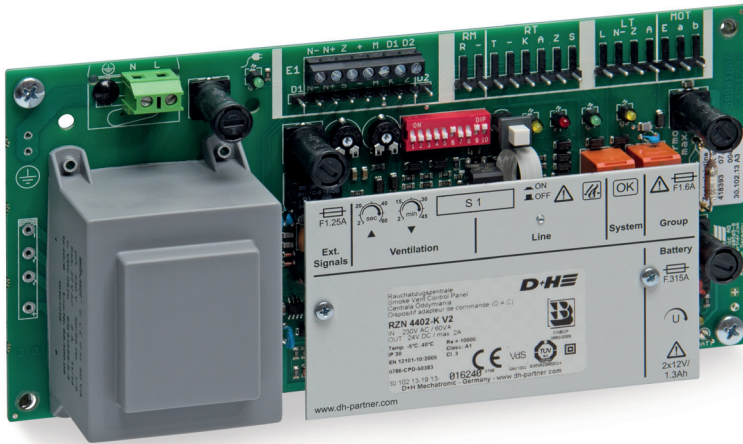

GEH-KST



G 501002



0786-CPD-50383



B 06 05 22802 024

Find out about permission details from your D+H Partner

Performance features

- » Compact SHEV controller, specifically for stairwells
- » Up to 2 A total drive current
- » Stabilised output voltage
- » Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- » Integrated comfort functions for daily ventilation
- » 1 slot for an additional module
- » Optional connection to rain detectors or wind/rain detectors without an additional module
- » Connection of up to 8 SHEV buttons and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- » Min. 72 hr battery backup supply

Accessories

Battery




SHEV operation panels



Sensor systems



Example of application

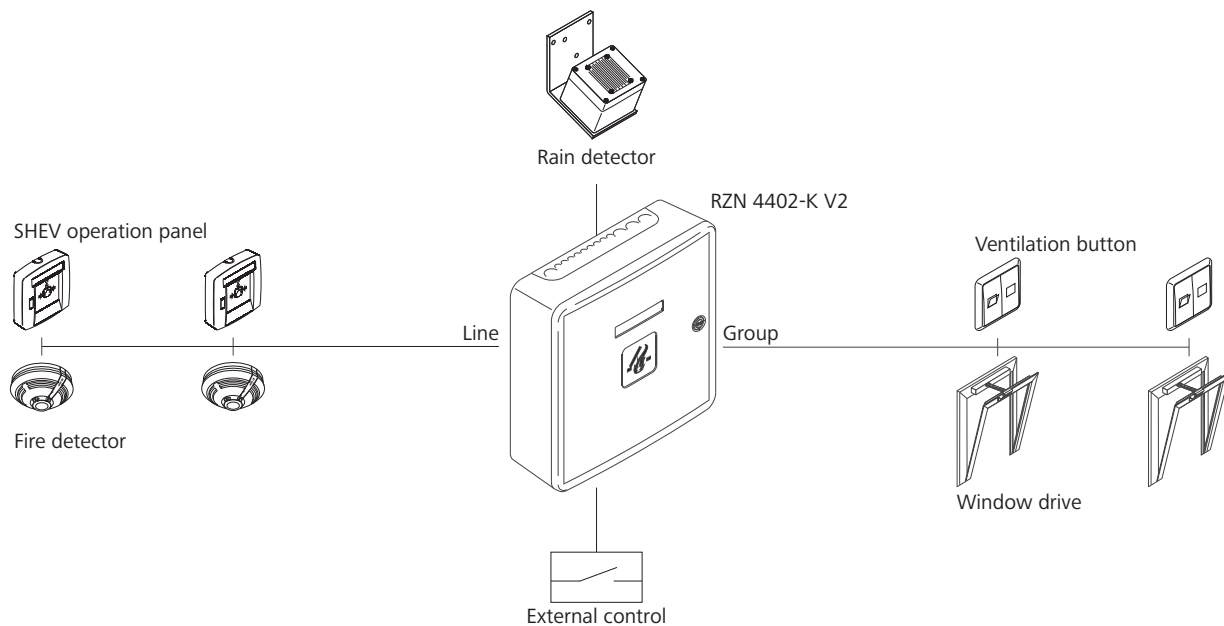

Technical data

| | |
|---------------------------------------|---------------------------------|
| Supply | 230 V AC / 50 Hz / 60 VA |
| Stand-by power | 5.6 W |
| Output | 24 V DC / max. 2 A |
| Mode of operation monitoring | Continuous duty |
| Mode of operation Alarm / Ventilation | Short-time duty 30 % duty cycle |
| Temperature range | -5 °C ... +40 °C |
| Battery type | Type 1 (2x) |

Design

| Type | Art. No. | Housing | Type of protection | W x H x (D) in mm | Weight | Remark |
|------------------|-----------|-------------|--------------------|-------------------|---------|--|
| ZP-RZN 4402-K V2 | 30.102.13 | | | | 1.80 kg | With alarm devices = battery type 2 (2x) |
| GEH-S RWA | 30.105.30 | Steel sheet | IP 54 | 400 x 300 x 120 | 7.25 kg | |
| GEH-KST | 63.600.81 | Plastic | IP 30 | 310 x 310 x 100 | 1.40 kg | |
| RZN 44xx-K/M | 30.104.70 | | | | | Variable equipment possible |